

BRILLIANCE PAVERS




BR-15



BR-17



BR-19



BR-20




BR-30




BR-33



BR-35



BR-40



BR-60




BR-65

Due to the natural variances in aggregate materials and camera limitations, the color characteristics of our manufactured glitter pavers have been digitally altered to highlight the glitter affect. Your monitor or printer may not be an accurate representation of the actual production color or finish. Please request a free sample to experience the true effect of our product.

PROPERTY	ADVANCED TESTING VALUE	TEST METHOD
Compressive Strength	> 8,000 PSI avg. with no individual unit less than 7,500 PSI	ASTM C 140
Water Absorption	< 6%	ASTM C 140
Flexural Strength	> 1,200 pounds average	ASTM C 140
Freeze/Thaw	< 1% loss of dry weight (100 cycles)	ASTM C 1262
Center Load	1,850 lbs.	WTCL 99

Testing based on 24"x24"x2" pressed paver

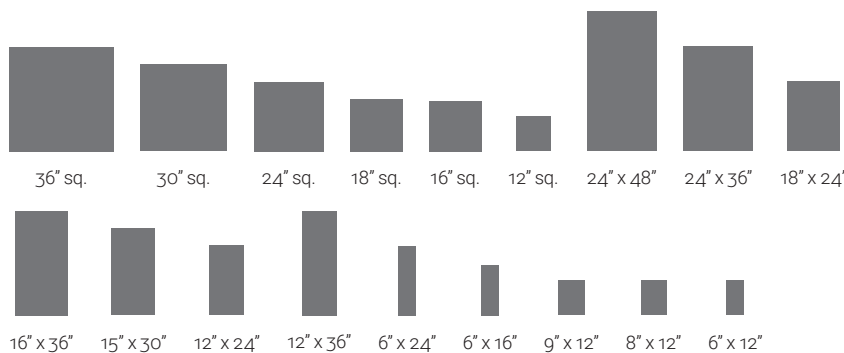

STANDARD SIZES

All pavers available in thickness ranging from 1 3/4" - 3" on certain sizes. In addition to these standard sizes, each Wausau Tile paver series is available in a variety of standard and custom plank-style paver sizes.

Check WausauTile.com or call your sales rep for more details.

CALL FOR FURTHER DETAILS & PRICING.

P: 800.388.8728 | E: wtile@wausautile.com | WAUSAUTILE.COM