




NORTHERN LIGHTS




NLW-15
WASHED
DAY/NIGHT



NLW-30
WASHED
DAY/NIGHT



NLG-15
GROUND AND BLASTED
DAY/NIGHT

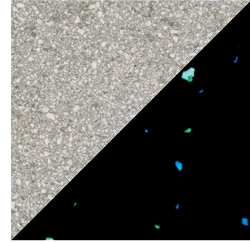

NLG-30
GROUND AND BLASTED
DAY/NIGHT



PROPERTY	ADVANCED TESTING VALUE	TEST METHOD
Compressive Strength	> 8,000 PSI avg. with no individual unit less than 7,500 PSI	ASTM C 140
Water Absorption	< 6%	ASTM C 140
Flexural Strength	> 1,200 pounds average	ASTM C 140
Freeze/Thaw	< 1% loss of dry weight (100 cycles)	ASTM C 1262
Center Load	1,850 lbs.	WTCL 99

Testing based on 24"x24"x2" pressed paver

STANDARD SIZES

Pavers available in thickness ranging from 1 3/4" - 3 depending on the size. In addition to these standard sizes, each Wausau Tile paver series is available in a variety of standard and custom plank-style paver sizes.

Check WausauTile.com or call your sales rep for more details.

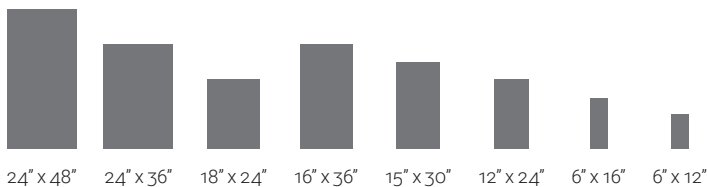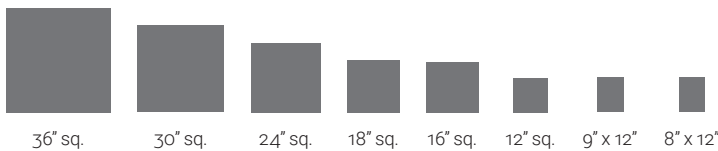

AGGREGATE TECHNICAL INFO

Considered to be a non-hazardous, non-toxic and non-radioactive photoluminescent aggregate

Glow Persistence: 12+ hours

Charge Time: 8 minutes

Longevity: Aggregate is considered a 20+ year product

NFPA Ratings: Health: 0 Flammability: 0 Reactivity: 0

Effects of Overexposure: None

Listed Carcinogen: None

Due to the natural variances in aggregate materials, the color characteristics of manufactured pavers may differ slightly from the color swatches pictured. Your monitor or printer may not be an accurate representation of the actual production color or finish.

CALL FOR FURTHER DETAILS & PRICING.

P: 800.388.8728 | E: wtile@wausautile.com | WAUSAUTILE.COM