




PRAIRIE SERIES TERRAZZO TILE




TZG70
DOGWOOD




TZG71
CLOVER




TZG72
WILD RYE




TZG73
STONECROP




TZG74
TRILLIUM



TZG75
MILKWEED



TZG76
CONEFLOWER




TZG77
PHLOX

PROPERTY	ADVANCED TESTING VALUE	TEST METHOD
Compression Strength	> 8,000 PSI avg.	ASTM C140
Water Absorption	< 5% avg.	ASTM C140
Flexural Strength	Meets or exceeds standard	ASTM C140/C293
Bond Strength	> 300 PSI	ASTM C482
Warpage Edge	+/- .001% or .002 in.	ASTM C485
Warpage Diagonal	+/- .003% or .010 in.	ASTM C485
Nominal Size	Range of .029 in.	ASTM C499
Thickness	Range of .029 in.	ASTM C499
DCOF	Passes at Factory	ANSI A326.3

Testing based on 12" x 12" x 1/2" tile

STANDARD SIZES

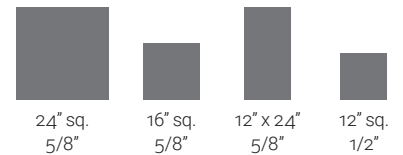

Due to the natural variances in materials, the color characteristics of manufactured terrazzo tile may differ slightly from the color swatches pictured. Your monitor or printer may not be an accurate representation of the actual production color or finish.

Custom Colors Available.

CALL FOR FURTHER DETAILS & PRICING.

P: 800.388.8728 | E: wtile@wausautile.com | WAUSAUTILE.COM