




PRAIRIE SERIES TERRAZZO TILE




TZG70
DOGWOOD




TZG71
CLOVER



TZG72
WILD RYE




TZG73
STONECROP




TZG74
TRILLIUM



TZG75
MILKWEED



TZG76
CONEFLOWER




TZG77
PHLOX

PROPERTY	ADVANCED TESTING VALUE	TEST METHOD
Compression Strength	> 8,000 PSI avg.	ASTM C140
Absorption	< 5% avg.	ASTM C140
Flexural Strength	> 1,000 PSI avg.	ASTM C293
C373 Water Absorption	Passes (Semi-Vitreous)	-
C482 Bond Strength	> 300 PSI	-
C485 Warpage Edge	+/- .001% or .002 in.	-
C485 Warpage Diagonal	+/- .003% or .010 in.	-
C499 Nominal Size	Range of .029 in.	-
C499 Thickness	Range of .029 in.	-
Dynamic DCOF	Passes at Factory	-
ANSI A173.1 Section 9.6.1	Wet Dynamic Coefficient of Friction (DCOF)	-
Avg. Polished Finish	0.46	-
Avg. Honed Finish	0.54	-

Testing based on 12" x 12" x 1/2" tile

STANDARD SIZES

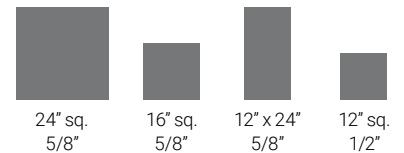

Due to the natural variances in materials, the color characteristics of manufactured terrazzo tile may differ slightly from the color swatches pictured. Your monitor or printer may not be an accurate representation of the actual production color or finish.

Custom Colors Available.

CALL FOR FURTHER DETAILS & PRICING.

P: 800.388.8728 | E: wtile@wausautile.com | WAUSAUTILE.COM

11.01.2021