



REFLECTIONS SERIES TERRAZZO TILE



TZ301
FROST




TZ302
PLATINUM




TZ303
STERLING




TZ304
VAPOR




TZ305
LATTE




TZ306
STRAW



TZ307
MOCHA



TZ308
TWILIGHT




TZ309
COAL

PROPERTY	ADVANCED TESTING VALUE	TEST METHOD
Compression Strength	> 8,000 PSI avg.	ASTM C140
Absorption	< 5% avg.	ASTM C140
Flexural Strength	> 1,000 PSI avg.	ASTM C293
C373 Water Absorption	Passes (Semi-Vitreous)	-
C482 Bond Strength	> 300 PSI	-
C485 Warpage Edge	+/- .001% or .002 in.	-
C485 Warpage Diagonal	+/- .003% or .010 in.	-
C499 Nominal Size	Range of .029 in.	-
C499 Thickness	Range of .029 in.	-
Dynamic DCOF	Passes at Factory	-
ANSI A173.1 Section 9.6.1	Wet Dynamic Coefficient of Friction (DCOF)	-
Avg. Polished Finish	0.46	-
Avg. Honed Finish	0.54	-

Testing based on 12" x 12" x 1/2" tile

STANDARD SIZES

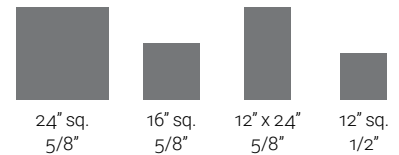

Due to the natural variances in materials, the color characteristics of manufactured terrazzo tile may differ slightly from the color swatches pictured. Your monitor or printer may not be an accurate representation of the actual production color or finish.

Custom Colors Available.

CALL FOR FURTHER DETAILS & PRICING.

P: 800.388.8728 | E: wtile@wausautile.com | WAUSAUTILE.COM