




# SERIES SESTO™ TERRAZZO TILE




SST10  
PISA




SST11  
DALMATA




SST12  
BIANCO




SST13  
ZUCCA




SST14  
SOLE




SST15  
COLOSSEUM




SST16  
VENERE




SST17  
NOTTE




SST18  
ROMAN



SST19  
CAFFE



SST20  
RAVELLO




SST21  
POMPEII

| PROPERTY                  | ADVANCED TESTING VALUE                     | TEST METHOD |
|---------------------------|--|-------------|
| Compression Strength      | > 8,000 PSI avg.                           | ASTM C140   |
| Absorption                | < 5% avg.                                  | ASTM C140   |
| Flexural Strength         | > 1,000 PSI avg.                           | ASTM C293   |
| C373 Water Absorption     | Passes (Semi-Vitreous)                     | -           |
| C482 Bond Strength        | > 300 PSI                                  | -           |
| C485 Warpage Edge         | +/- .001% or .002 in.                      | -           |
| C485 Warpage Diagonal     | +/- .003% or .010 in.                      | -           |
| C499 Nominal Size         | Range of .029 in.                          | -           |
| C499 Thickness            | Range of .029 in.                          | -           |
| Dynamic DCOF              | Passes at Factory                          | -           |
| ANSI A173.1 Section 9.6.1 | Wet Dynamic Coefficient of Friction (DCOF) | -           |
| Avg. Polished Finish      | 0.46                                       | -           |
| Avg. Honed Finish         | 0.54                                       | -           |

Testing based on 12" x 12" x 1/2" tile

## STANDARD SIZES

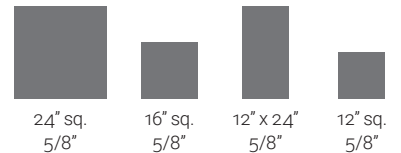

Due to the natural variances in materials, the color characteristics of manufactured terrazzo tile may differ slightly from the color swatches pictured. Your monitor or printer may not be an accurate representation of the actual production color or finish.

Custom Colors Available.

**CALL FOR FURTHER DETAILS & PRICING.**

P: 800.388.8728 | E: wtile@wausautile.com | WAUSAUTILE.COM